


OPTION: REPLACE DOUBLE CORNER POSTS WITH A SINGLE 4"x6" CORNER POST. SECURELY ATTACH TO DECK STRUCTURE AND CAP RAIL. CABLES MUST BE TERMINATED AT SINGLE POST. OFFSET DRILL HOLES AT LEAST 1/2" TO ALLOW INTERNAL CLEARANCE FOR CABLE END FITTINGS

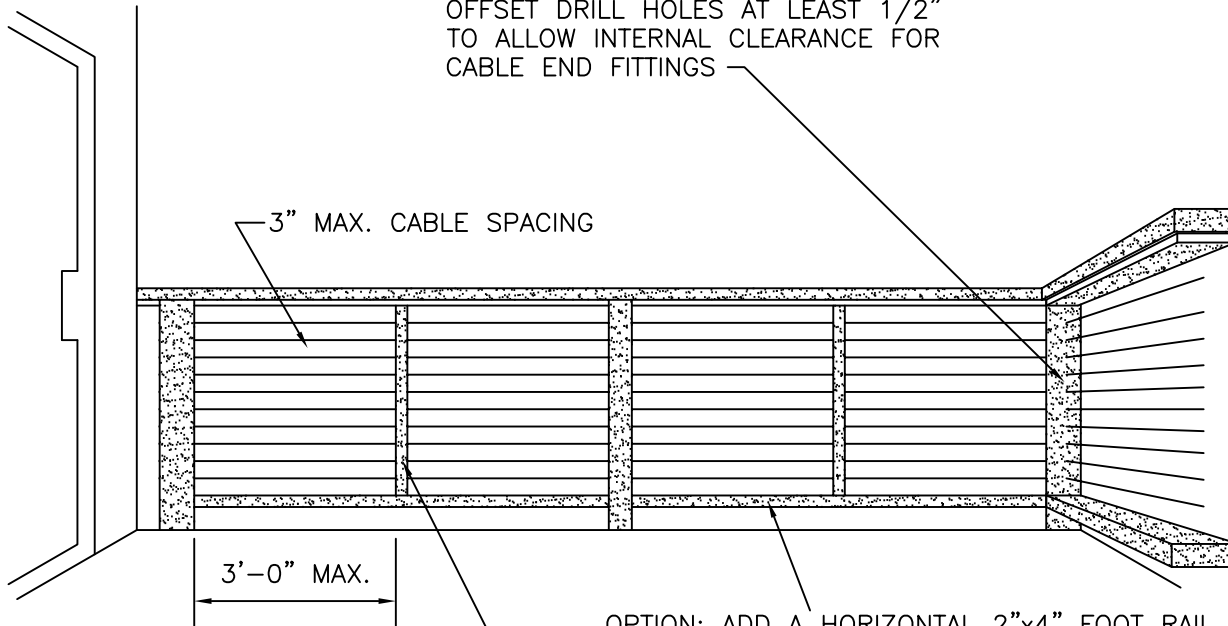

OPTION: ADD A HORIZONTAL 2"x4" FOOT RAIL BETWEEN POSTS. SPACE NO MORE THAN 4" ABOVE DECK SURFACE OR PER LOCAL CODE.

OPTION: REPLACE 4"x4" INTERMEDIATE POSTS WITH SLENDER VERTICAL SPACER PICKETS (1"x2", 2"x2", 2"x4" WOOD STRIPS; METAL BAR STOCK; OR EVEN COPPER WATER TUBING) SECURELY ATTACH TO CAP RAIL AND FOOT RAIL OR DECK STRUCTURE.

MAINTAIN 3'-0" MAX. SPACING BETWEEN POSTS & VERTICAL SPACER PICKETS TO MINIMIZE CABLE DEFLECTION.

NOTE: BUILDING CODES VARY BY CITY & COUNTY. FOLLOWING THE INSTALLATION AND RAILING DESIGN INSTRUCTIONS AS DETAILED IN THIS DRAWING DOES NOT GUARANTEE CODE COMPLIANCE IN ALL AREAS. BEFORE STARTING THE PROJECT, CHECK WITH LOCAL REQUIREMENTS FOR USING AND INSTALLING CABLE RAILINGS.

feeneyarchitectural
PRODUCTS

CableRail™ - Standard Assemblies
2603 Union Street
Oakland, CA 94607-2423
Ph: 800-888-2418 or 510-893-9473
Fx: 510-893-9484, www.cablerail.com